



Internally Illuminated Street Name Signs Owner's Manual

Southern's internally illuminated street name signs are designed for long service and to meet or exceed all Federal and state standards including withstanding hurricane force winds. They are also engineered to be easy to install and maintain. All signs share the same basic engineering and design concepts despite stylistic differences. In other words the edge-lit Clean Profile sign incorporates all of the design features of the standard A body design. The difference being the light management which is achieved through the addition of advanced optics.

A one page installation and troubleshooting guide is attached to this manual and is provided with each sign order.


Installation:

All signs have an exterior access panel that has the terminal block and a fuse. The signs come wired to the terminal block, so all that is necessary to wire the sign in the field is to attach the incoming power to the terminal block. The access panel is attached using 2 thumb screws, so no tools are needed to remove the access cover plate. The thumb screws cannot fall out and be lost.

All signs are designed to be mounted with standard traffic signal and sign mounting hardware provided by others.

Service:

- Fuse – There is a fuse holder in the access panel that holds a standard fuse with the cap attached. These are readily available from Southern or local electrical supply houses and require no tools to change.

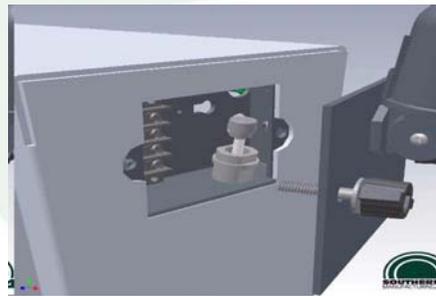





- Internal Components
 - The doors are secured with stainless steel keeper latches on the top of the sign. The sign can be opened by flipping up the tab and turning each latch.



- There are three components inside of the sign:
 - The power supply/ballast is located on the top or side of the interior of the sign and can be replaced easily.

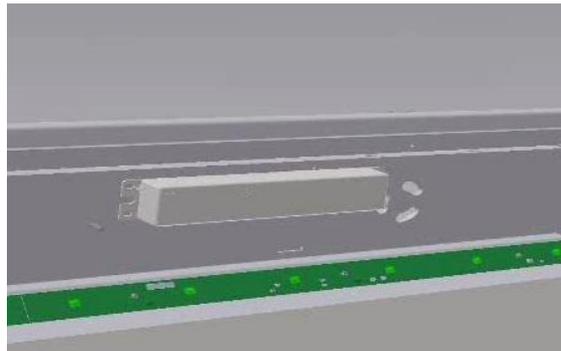

- If the sign is fluorescent, the lamps are easily accessible and are standard T12 lamps with recessed double contact fitting.
- If the sign is LED, the LED strips are chained together with Molex clips. To remove an LED strip,
 - Unclip the electrical connector.
 - Remove the three Philips screws that hold the LED strip and heat sink in place.
 - Replace the strip and reconnect the wire clip.
 - The strips come in 1' and 2' lengths and the strips for the Clean Profile sign have added optics. Other than the optics they are the same. These LED strips are engineered so that if one LED fails, the others will continue to operate. The rated life is 60,000. They are a custom strip and must be ordered from Southern Manufacturing.

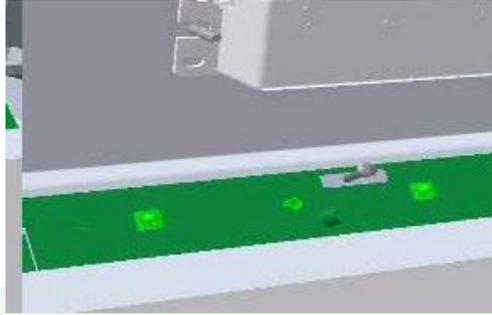

- Lens – The lens is made from 3 millimeter polycarbonate sheeting and can be removed by bowing the lens inward and working it out of the flanges in the door. **NO TOOLS ARE REQUIRED.** To insert a new lens reverse the process. Replacement lenses can be ordered from Southern Manufacturing or can be made by most sign shops that have the software to make street names.

All signs are fabricated from the same .125” 5052 aluminum that is used to make traffic enclosures. They are designed for ease of service and unless the sign is being repainted, most service can be done without removing the sign. The signs have a seven (7) year manufacturer’s limited warranty.

For technical support contact Southern Manufacturing at 407-894-8851 or by email to contactus@southernmfg.com

Jan 2013