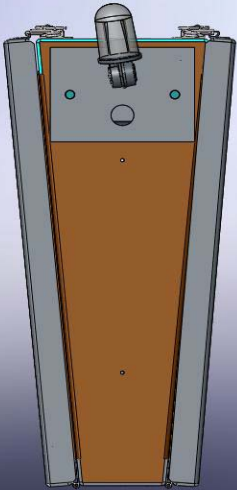


STANDARD

Designed for maximum illumination and easy maintenance. Available in single or double face. Rigid or swinging mount. 19" and 24" tall. Available with LED or fluorescent lighting

]←9.375"/ 37 cm →[Lens	OAH
	↓ 15" or 20" - 59/79 CM ↑	↑ 19" or 24" 75/95 CM
]←5.375"/ 21 cm →[